

分時序注塑控制器

Sequential Moulding Controller



▶▶ 二段時間差控制，可擴充至三段

Two section time control. And it is able to change to three section time control.

▶▶ 雙排LED顯示

Dual lines LED display.

▶▶ 單位顯示

Unit display.


▶▶ 時間單位最小0.1秒（可調為0.01秒）

The minimum unit of time is to 0.1 second (Adjustable to 0.01 second).

▶▶ 電磁閥及增壓器規格齊全，可適用於各種閥門設計

Various specs. of solenoid valve and boosting cylinder fit for various kinds of valve gate systems.

面板介紹 FEATUARE

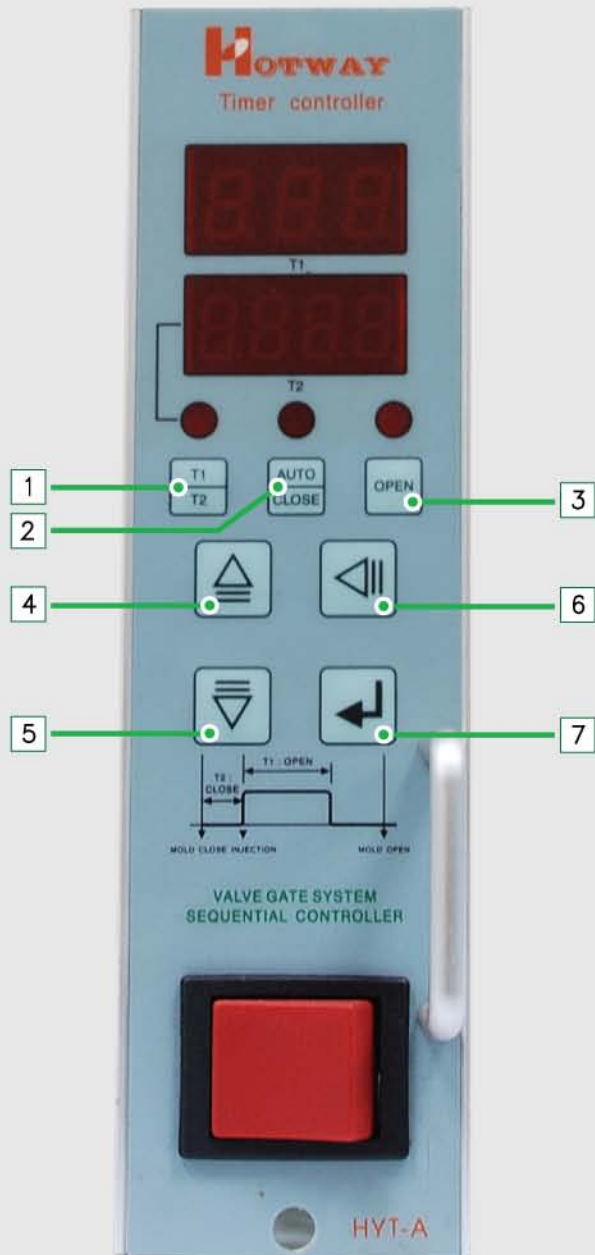

- 1 T,選擇時間Ta, Tb, Tc, Td, Te, Tf
- 2 AUTO/CLOSE, 自動模式選擇
- 3 OPEN, 手動模式選擇
- 4 數值往上遞加
- 5 數值往下遞減
- 6 數位移動
- 7 數值確定

訂購規格碼 ORDER CODE

6 T T M T

外箱
Cabinet Zone

01=1
02=2
03=3
05=5
06=6
08=8
12=12

面板
Controller Zone

01=1
02=2
03=3
04=4
⋮